

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
11 March 2004 (11.03.2004)

PCT

(10) International Publication Number
WO 2004/020100 A1

- (51) International Patent Classification⁷: **B02C 19/00**
- (21) International Application Number:
PCT/SE2003/001317
- (22) International Filing Date: 27 August 2003 (27.08.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
0202532-8 28 August 2002 (28.08.2002) SE
- (71) Applicant (for all designated States except US): SAND-
VIK AB [SE/SE]; S-811 81 Sandviken (SE).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **DALLIMORE,
Rowan** [GB/GB]; 5 Charlton Park, Midsomer Norton,
Radstock BA3 4BN (GB).
- (74) Agent: AWAPATENT AB; Box 5117, S-200 71 Malmö
(SE).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SI, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A HOLDER FOR A WEAR PART OF A CRUSHER

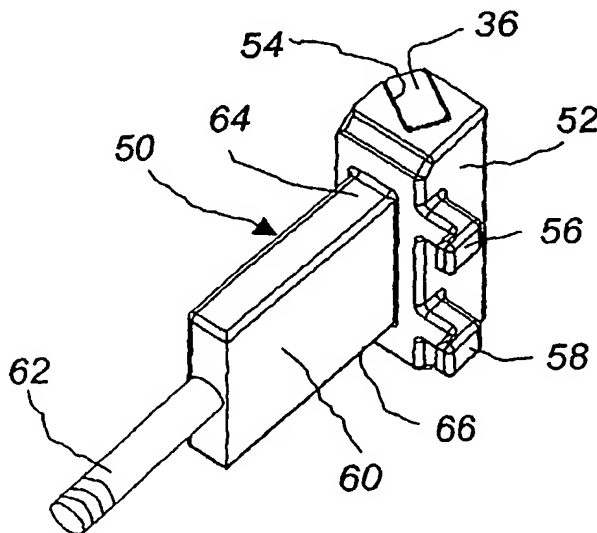

(57) Abstract: A rotor of a vertical shaft impact crusher comprises a vertical rotor wall segment having a first wall portion being substantially tangential in relation to the rotor and a second wall portion being angled in relation to said first wall portion. A tip holder (50) for mounting at an outflow opening of such a rotor comprises a holding part (52) for holding a wear tip (36). A fastening means (60, 62) is attached to the holding part (52). The fastening means (60, 62) is adapted to extend along said first wall portion and through said second wall portion from one side thereof. A fixing means is detachably fixable to the fastening means (62) at the other side of said second wall portion.